

**SKB**

**TECHNICAL  
REPORT**

**87-19**

**Calculation of gas migration  
in fracture rock – a continuum  
approach**

Carol Braester  
Israel Institute of Technology  
Haifa, Israel

Roger Thunvik  
Royal Institute of Technology  
Stockholm, Sweden

Stockholm, September 1987

**SVENSK KÄRNBRÄNSLEHANTERING AB**

*SWEDISH NUCLEAR FUEL AND WASTE MANAGEMENT CO*

BOX 5864 S-102 48 STOCKHOLM

TEL 08-665 28 00 TELEX 13108-SKB

CALCULATION OF GAS MIGRATION IN FRACTURED ROCK -  
A CONTINUUM APPROACH

Carol Braester  
Israel Institute of Technology  
Haifa, Israel

Roger Thunvik  
Royal Institute of Technology  
Stockholm, Sweden

Stockholm, September 1987

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the author(s) and do not necessarily coincide with those of the client.

Information on KBS technical reports from 1977-1978 (TR 121), 1979 (TR 79-28), 1980 (TR 80-26), 1981 (TR 81-17), 1982 (TR 82-28), 1983 (TR 83-77), 1984 (TR 85-01), 1985 (TR 85-20) and 1986 (TR 86-31) is available through SKB.

CALCULATION OF GAS MIGRATION IN FRACTURED ROCK -  
A CONTINUUM APPROACH

Carol Braester  
Israel Institute of Technology  
Haifa, Israel

Roger Thunvik  
Royal Institute of Technology  
Stockholm, Sweden

Stockholm , September 1987

ABSTRACT

A study of gas migration from low level radioactive repositories in which the fractured rock mass was conceptualized as a continuum, was carried out by the aid of a computer program based on a finite difference numerical method of solution to the equations of flow. The displacement is considered to be governed by the equations of simultaneous two-phase flow, gas and water. Without having the possibility of practical determination of the parameters of the continuum equivalent such as capillary pressure and relative permeabilities of the fractured rock, these functions were assumed. The calculations are intended to correspond to the prevailing in the Forsmark low level repository area where radioactive waste repository caverns are planned to be located at a depth of about 50 metres below the sea level. Chemical reactions in the stored waste will result in gas (hydrogen) production in a saturated water environment. Under such conditions the gas will displace the water from the rock and migrate towards the surface and finally be released through the sea bottom. Calculations were worked out for a constant gas flow rate equivalent to a gas production of 20000 normal cubic metres per year. The investigated flow domain was a vertical cross-section passing through the repository. The results show that in the empty cavern the gas formed in the cavern moves almost instantaneously upward and accumulates below the roof of the cavern. The gas penetrates the rock and displaces the water after a gas cushion of 0.4 m, corresponding to the assumed entry capillary pressure value, is formed below the roof of the cavern. In the cavern, the gas-water interface is horizontal. The gas advance is faster in the centre of the repository than at the edges. The displacement is limited to the near region to the repository. The breakthrough time at the sea bottom is about 0.6 days. The results are different from those obtained in the previous studies in which the rock was conceptualized as a discrete system of fractures in which the flow process is dominated by the largest fractures and as a consequence the breakthrough time is smaller.

CONTENTS

ABSTRACT

LIST OF FIGURES .....	4
NOMENCLATURE .....	5
1. INTRODUCTION .....	6
2. GOVERNING EQUATIONS OF FLOW .....	8
3. METHOD OF SOLUTION .....	11
4. INPUT PARAMETERS .....	11
5. BOUNDARY AND INITIAL CONDITIONS .....	14
6. RESULTS .....	15
REFERENCES .....	16

LIST OF FIGURES

- | <u>Figure</u> | <u>Caption</u>  |
|---------------|---|
| Figure 1.     | Schematic representation of the location of the repository: (a) a longitudinal cross-section and (b) a transverse cross-section through the repository. |
| Figure 2.     | The discretization of the flow domain: (a) total flow domain and (b) the region around the repository.  |
| Figure 3.     | The capillary pressure function of saturation.  |
| Figure 4.     | The relative permeabilities for gas and water as functions of saturation.   |
| Figure 5.     | The gas-water front after 0.45 days.  |
| Figure 6.     | The gas-water front after 0.55 days.  |
| Figure 7.     | The gas-water front and the water saturation distribution at breakthrough at 0.6 days.  |
| Figure 8.     | The initial hydrostatic water pressure distribution and at the breakthrough at 0.6 days.  |

NOMENCLATURE

<u>symbol</u>	<u>description</u>	<u>dimension</u>
$c_w$	compressibility of the fluid	$M^{-1} Lt^2$
$c_r$	compressibility of the rock matrix	$M^{-1} Lt^2$
$g$	acceleration of gravity	$Lt^{-2}$
$k$	permeability	$L^2$
$M$	molecular weight of the gas	$M \text{ mole}^{-1}$
$p$	pressure	$ML^{-1} t^{-2}$
$p_c$	capillary pressure	$ML^{-1} t^{-2}$
$Q$	mass rate of flow	$ML^{-3} t^{-1}$
$R$	gas constant	$ML^2 t^{-2} T^{-1} \text{ mole}^{-1}$
$t$	time	$t$
$S$	saturation	-
$T$	temperature	$T$
$u$	volumetric rate of flow per unit area	$Lt^{-1}$
$Z$	correction factor for real gases	-

<u>Greek</u>	<u>description</u>	<u>dimension</u>
$\rho$	density	$ML^{-3}$
$\mu$	dynamic viscosity	$ML^{-1} t^{-1}$
$\phi$	porosity	-

subscripts

w	water
g	gas
r	rock

## 1. INTRODUCTION

In the previous studies on gas migration from low level radioactive repositories (SKBF-KBS: 83-21, SFR-Progress Report 86-04), the rock mass was conceptualized as a discontinuous system of fracture planes intersecting the rock cavern. The discrete approach was considered to represent better the actual flow phenomena associated with gas-water displacement in a fractured rock mass than the continuum approach. However parallel studies using the continuum approach were carried out by Intera (1986).

The result presented by Intera exhibited some unexpected flow phenomena requiring further investigation before being accepted. This implies in particular the unrealistic results obtained for the saturation distribution (Intera 1986, Fig. 4.6) which showed a faster displacement of the gas at the edges of the repository than in the centre. It is obvious that with an unrealistic saturation distributions all the other results e.g., the breakthrough time of the gas at the sea bottom are unreliable.

It was therefore decided to perform a comparative study using same data as those used by Intera in order to study if the flow phenomena reported could have any physical foundation or must have been the result of conceptual mistakes in the modelling. The present study demonstrates that the flow phenomena stated by Intera have no foundation whatsoever. Moreover, it was possible to reconstruct the mistake made in the modelling which caused the spurious results presented.

The study was carried by using Nolen's two-phase V.I.P. - Vectorized Implicit Program. The results of the present calculations are in total agreement with the actual physical behaviour of the flow process but not in agreement with the results obtained by Intera.

The gas (hydrogen) generated in the cavern is due to chemical reactions in the stored waste. The gas will be produced in a saturated water environment and due to the difference in density with respect to the water, the gas will migrate upward and finally escape through the sea bottom. The calculations presented here are intended to correspond to the prevailing in the Forsmark area.



In the discrete approach with a fracture width distribution the flow is dominated by the fractures of high permeability. In the present study with the continuum approach the rock is considered homogeneous so that under similar conditions the displacement is identical in any cross-section through an ideal cavern of infinite extent. The cavern is considered to have a horizontal roof and is treated as an empty cavity.

Being theoretically of infinite permeability, the gas formed in some part of the cavern will spread almost instantaneously along the cavern. The length of the cavern is more than 10 times larger than its height and its width, so that practically, with except to the ends of the cavern, the rest of it will behave like one of an infinite extent. For these reason the flow pattern through a two-dimensional vertical cross section passing the repository may be considered to be representative for the flow pattern.

Gas-water displacement is a non-wetting - wetting fluid displacement, so that a pressure entry value or a threshold pressure should be reached to initiate the displacement. Such an overpressure in the gas phase is equivalent to the formation of a gas cushion of a certain thickness in the cavern. This threshold pressure is dictated by the capillary pressure, a function of fluid saturation and of the formation under the consideration, conceptualized as as a continuum.

The continuum approach also requires that relative permeabilities for gas and water functions of saturation be supplied. Since it is impossible to determine a capillary pressure curve or relative permeability curves for a fractured rock these functions have to be assumed.

In the continuum approach the rock properties values represent average values of an elementary rock volume. The present study is carried out using a finite difference method of solution which requires a discretization of the flow domain in a number of grid blocks. The discretization mesh considered by Intera, and also in this study, includes small sizes of the blocks, down to 0.1 by 0.1 m.

Such a discretization, including small sizes of the blocks in some regions, is necessary to obtain accurate numerical solutions. As the representative size of an elementary block of a fractured rock formation is at least of order of magnitude of meters and it should be obvious that transient solution results for blocks less than the representative size are not significant.

## 2. GOVERNING EQUATIONS OF FLOW

Simultaneous gas-water flow is governed by momentum (Darcy's law) and mass balance equations. These equations, being formulated for each phase separately, are coupled through the relationship between phases saturation and through the capillary pressure. To these equations one should add the equations of state, relating the density and the viscosity to pressure and temperature.

### (i) Gas flow equations

Darcy's law is

$$u_{gj} = - \frac{k k_r(S)}{\mu_g} (p_{g,j} - \rho_g g_j) \quad (1)$$

the mass conservation equation is

$$(\phi \rho_g)_{,t} + (\rho_g u_{gi})_{,i} + Q_g = 0 \quad (2)$$

where  $u$  is specific flux,  $k$  is absolute permeability,  $k_r$  is relative permeability function of fluid saturation,  $\mu$  is dynamic viscosity,  $\phi$  is porosity  $p$  is pressure,  $g$  is the acceleration of gravity and  $Q$  is the mass rate of gas production. Subscript  $g$  denotes the gas phase.

Expanding the time derivative, one obtains

$$(\phi \rho_g)_{,t} = \phi \rho_{g,t} + \rho_g \phi_{,t} \quad (3)$$

The density of the gas is related to pressure through the equation of state.

$$\rho_g = \frac{p_g M}{ZRT} \quad (4)$$

where M is the molecular weight to the gas, R is the universal gas constant, T is temperature and Z is the deviation factor of a real gas from the ideal gas behaviour and is a function of pressure and temperature.

The compressibility of the rock matrix is defined as

$$c_r = -\frac{1}{\phi} \frac{d\phi}{dp} \quad (5)$$

Substituting the relationships (4) and (5) into (3), we obtain

$$(\phi \rho_g)_{,t} = \frac{\phi M}{ZRT} (1 + p_g c_r) p_{g,t} \quad (6)$$

Substitution of equation (6) together with Darcy's law into equation (2), yields

$$\frac{\phi M}{ZRT} (1 + p_g c_r) p_{g,t} - \left( \frac{k_r k_g}{\mu_g} \frac{p_g M}{ZRT} (p_{g,i} - \frac{p_g M}{ZRT} \epsilon_i) \right)_{,i} + Q_g = 0 \quad (7)$$

(ii) Water flow equations

Darcy's law is

$$u_{wj} = - \frac{k k_{rw}(S_w)}{\mu_w} (p_{w,j} - \rho_w g_j) \quad (8)$$

and the equation for the conservation of mass is

$$(\phi \rho_w)_{,t} + (\rho_w u_{wi})_{,i} + Q_w = 0 \quad (9)$$

where subscript w denotes the water phase.

Expanding the time derivative in equation (9), one obtains

$$(\phi \rho_w)_{w,t} = \phi \rho_w c_w p_{w,t} + \rho_w \phi c_r p_{w,t} = c \rho_w \phi p_{w,t} \quad (10)$$

where  $c = c_w + c_r$  is the total (water and rock) compressibility  
 Substitution of equation (10) and Darcy's law into equation (9)  
 yields

$$\phi \rho_w c p_{w,t} - \left( \frac{k k_{rw}}{\mu_w} \rho_w (p_{w,i} - \rho_w g_i) \right)_{,i} = 0 \quad (11)$$

(iii) Phase saturations relationship

As follows from the definition of saturation, for the two phases  
 gas and water, filling the entire pore space

$$S_g + S_w = 1 \quad (12)$$

(iv) The capillary pressure

The pressure in the gas and in the water phase are related through  
 the capillary pressure ( $p_c$ )

$$p_c(S_w) = p_g - p_w \quad (13)$$

### 3. METHOD OF SOLUTION

The V.I.P. computer program is based on a finite difference method of solution to the equations of flow presented in the previous paragraph.

### 4. INPUT PARAMETERS

#### 4.1 The geometry of the flow domain

The repository is assumed to have a width of 12 metres, a height of 15 metres and a length of 160 metres. It is located at a depth of 50 metres below the sea bottom. The sea water level is 6 metres above the rock formation (Fig. 1).

The flow domain considered is a vertical cross-section passing through the repository. For reasons of symmetry it is enough to investigate only half flow domain with the axis of symmetry passing the centre of the repository. The considered half flow domain has an extent of 328 m in the horizontal direction and of 345 m in the vertical direction.

The flow domain was discretized into a quadrilateral grid of 18 blocks in the horizontal direction and 23 blocks in the vertical direction resulting in a total number of 414 grid blocks. The grid increments in the horizontal and in the vertical directions are presented in Table 1 and 2, respectively.

\*)

Table 1: Grid increments in the horizontal direction

-----								
Block number								
1	2	3	4	5	6	7	8	9
-----								
Increment (m)								
3.0	1.5	0.8	0.4	0.2	0.1	0.1	0.2	0.4
-----								

Table 1 (continued)

Block number								
10	11	12	13	14	15	16	17	18
Increment (m)								
0.8	1.5	3.0	6.0	10.0	20.0	40.0	80.0	160.0

\*)

Table 2: Grid increments in the vertical direction

Block number											
1	2	3	4	5	6	7	8	9	10	11	12
Increment (m)											
10	10	9	9	6	3	1	.5	.8	.4	.2	.1

Table 2 (continued)

Block number										
13	14	15	16	17	18	19	20	21	22	23
Increment (m)										
.2	.4	.8	1.5	2.5	4.0	5.5	5.5	10.	22.	40.

\*) In the horizontal directions the grid blocks are numbered from the left to the right; in the vertical direction the grid blocks are numbered downwards

#### 4.2 Rock and fluids parameter values

Rock and fluid parameters values are indicated in Table 3. Reference values are adjusted to the prevailing pressure and temperature conditions by the V.I.P. program.

Table 3: Parameter values

Parameter	Symbol	Value	Units
rock permeability	k	$5.28 \cdot 10^{-15}$	$m^2$
porosity		$10^{-4}$	
capillary pressure	$p_c$	Fig. 3	Pa
relative permeabilities	$k_r$	Fig. 4	-
compressibility of water (reference value)	$c_w$	$4.57 \cdot 10^{-6}$	$kPa^{-1}$
rock compressibility	$c_r$	$6.10 \cdot 10^{-6}$	$kPa^{-1}$
density of water (reference value)	$\rho_w$	1000.	$kgm^{-3}$
dynamic viscosity of water	$\mu_w$	$1.0 \cdot 10^{-3}$	Pas
density of the gas	$\rho_g$	$\rho_g = \frac{p_g M}{ZRT}$	$kgm^{-3}$
dynamic viscosity of the gas (reference value)	$\mu_g$	$8.5 \cdot 10^{-6}$	Pas
molecular weight of hydrogen	M	2.016	$kg \text{ mole}^{-1}$
universal gas constant	R	8.3143	$J \text{ mol}^{-1} K^{-1}$
temperature	T	283.16	K
deviation factor for real gases	Z	$Z = Z(p, T, M, R)$	-

## 5. BOUNDARY AND INITIAL CONDITIONS

The upper boundary, corresponding to the sea bottom is a constant pressure boundary. A pressure of 160.125 kPa, corresponding to a water column of 6 metres, was imposed on this boundary. The other boundaries (Fig. 2) are considered no flow (impervious) boundaries. The reason for this is that the left hand side boundary passing through the repository is a streamline, while the other boundaries are considered to be located far enough from the repository, so that the conditions imposed on these boundaries are not affected by the local flow phenomena in the region of the repository.

Such conditions correspond to an isolated cavern or to a system of parallel cavern located far enough from each other so that flow phenomena not interfere. The boundaries of the cavern are assumed pervious and not affected by the operations during the excavation.

The rate of production of gas resulting from corrosion is estimated to be 20000 normal cubic metres per year. This rate of flow distributed over the length of the cavern of 160 m, results in a rate of 0.34 normal cubic metres per day and metre. In the model this rate of flow was generated by distributed sources in the two-dimensional cross section of the cavern.

After filling the cavern the initial conditions of the flow through the aquifer will be reestablished. Neglecting the natural flow through the aquifer, these conditions correspond to a hydrostatic pressure distribution. This water pressure distribution and fully water saturated medium ( $S_w$ ) were considered to be the prevailing initial conditions (Fig. 8).



## 6. RESULTS

The results of the calculations, the saturation distribution at different times of displacement and the pressure distribution at breakthrough, are presented in Figs. 5 to 8.

In the empty cavern the gas formed in the cavern moves almost instantaneously upward and accumulates below the roof of the cavern. The gas penetrates the rock and displace water after a gas cushion of 0.4 m, corresponding to the assumed entry capillary pressure value, is formed below the roof of the cavern.

In the cavern, during the all stages of displacement, the gas-water interface is absolutely horizontal and differs from Intera results with a slope of the interface increasing from the centre of the repository outward.

The saturation distribution and the gas-water front ( $S_w = 1$ ) at the different stages of displacement, up to the breakthrough time equals to 0.6 days, is presented in Figs. 5 to 7. The gas advance, faster in the centre of the repository and slower at the edges, this way consistent to the expected physical behaviour. It differs from the results obtained by Intera with a faster advance at the edges of the repository and almost stagnant in the centre.


The breakthrough time at the sea bottom is 0.6 days in comparison to 11 days obtained by Intera.

Because of the large difference in the gas-water densities the displacement is limited to the near region to the repository. This means that the obtained results are relevant for a single cavern with lateral boundaries far for the repository, as well as for a system of parallel caverns located at a distance say two times the width of the cavern.


Pressure increases gradually in the cavern and reaches its highest value just before the breakthrough of the gas at the sea bottom. The present study indicates a maximum pressure increase in the cavern of 28.2 kPa. Intera reports an increase in the pressure in the cavern of 62 kPa after 2 days. That is to say considerably before the stated breakthrough time when the pressure is likely to have been much higher than after only 2 days.

#### REFERENCES

1. Braester, C., Thunvik, R., 1983, An analysis of the conditions of gas migration from a low-level radioactive waste repository, SKBF-KBS: 83-21.
2. Thunvik, R., Braester, C., 1986, Calculation of gas migration in fractured rocks, SFR-Progress Report 86-04
3. Carlsson, L., Carlsten, S., Sigurdsson, T., Winberg, A., 1985, Hydraulic Modeling of The Final Repository for Reactor Waste (SFR), Swedish Geological Co., - Compilation and Conceptualization of Available Geological and Hydrological Data, Swedish Geological Co. IRAP 85406.
4. Pahva B. Suresh, 1986, Migration in fractured rock from a low level waste repository using a two-phase flow code, Intera Technologies Inc. Austin, Texas.

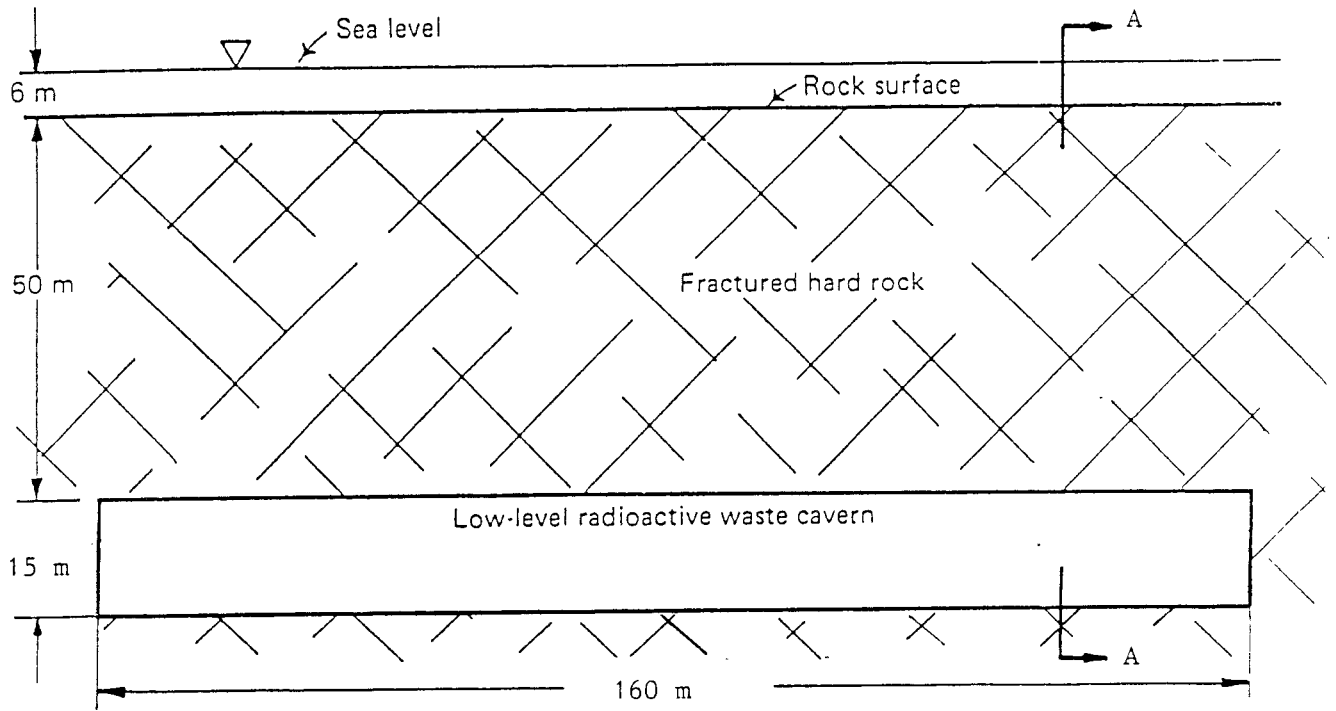


(a)

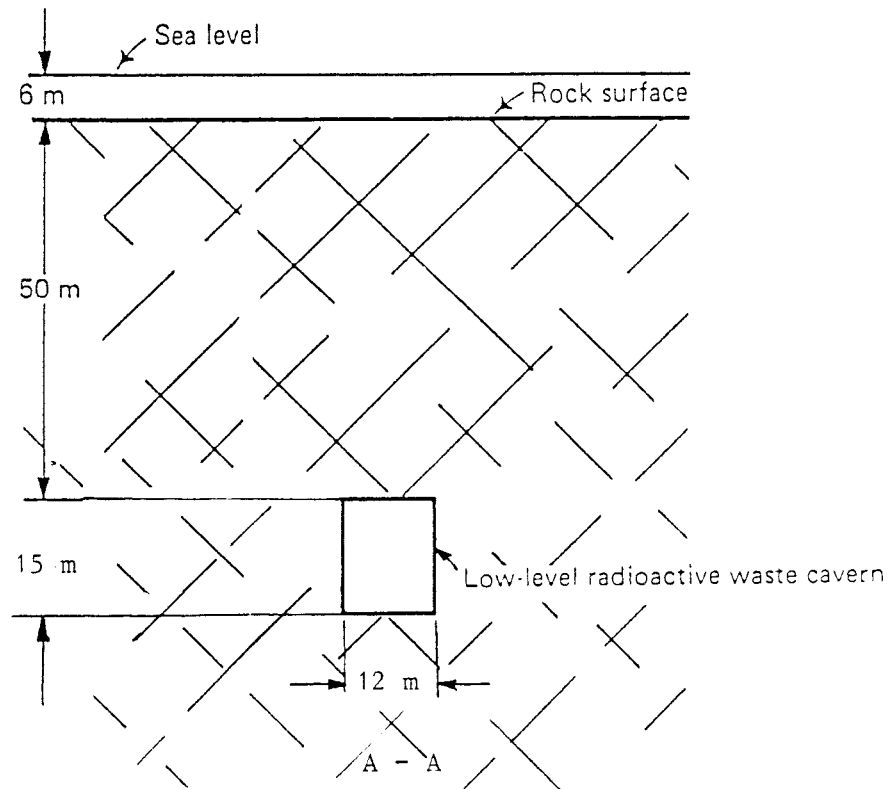


(b)

Figure 1. Schematic representation of the location of the repository: (a) a longitudinal cross-section and (b) a transverse cross-section through the repository.

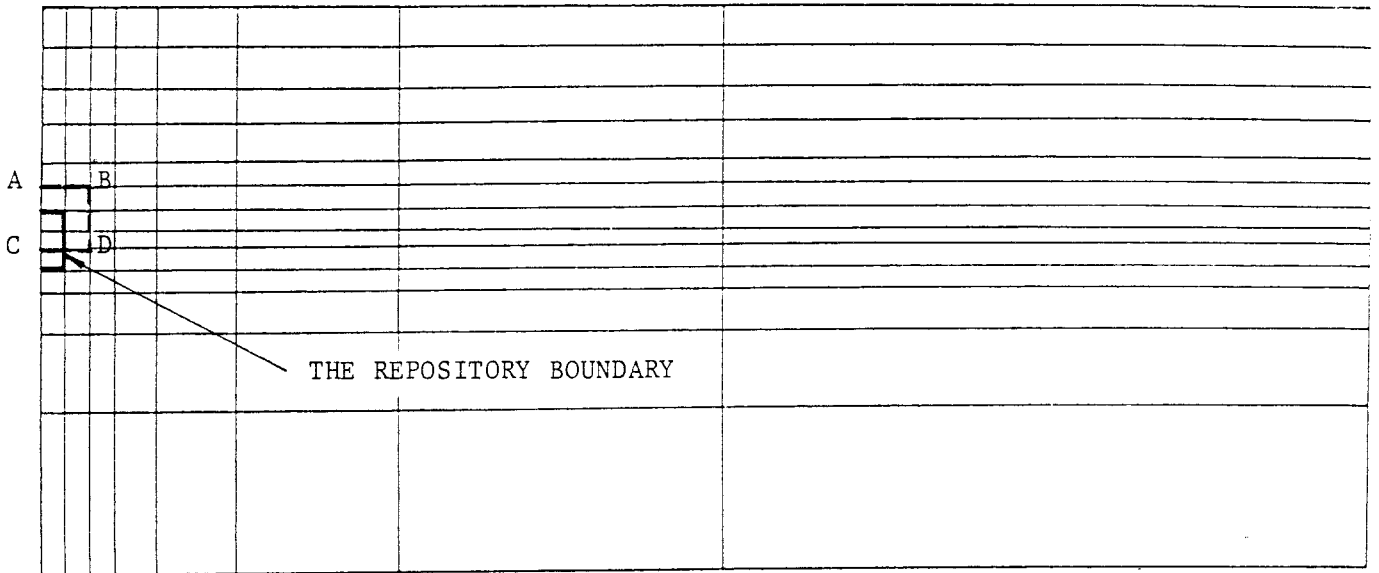

(a)

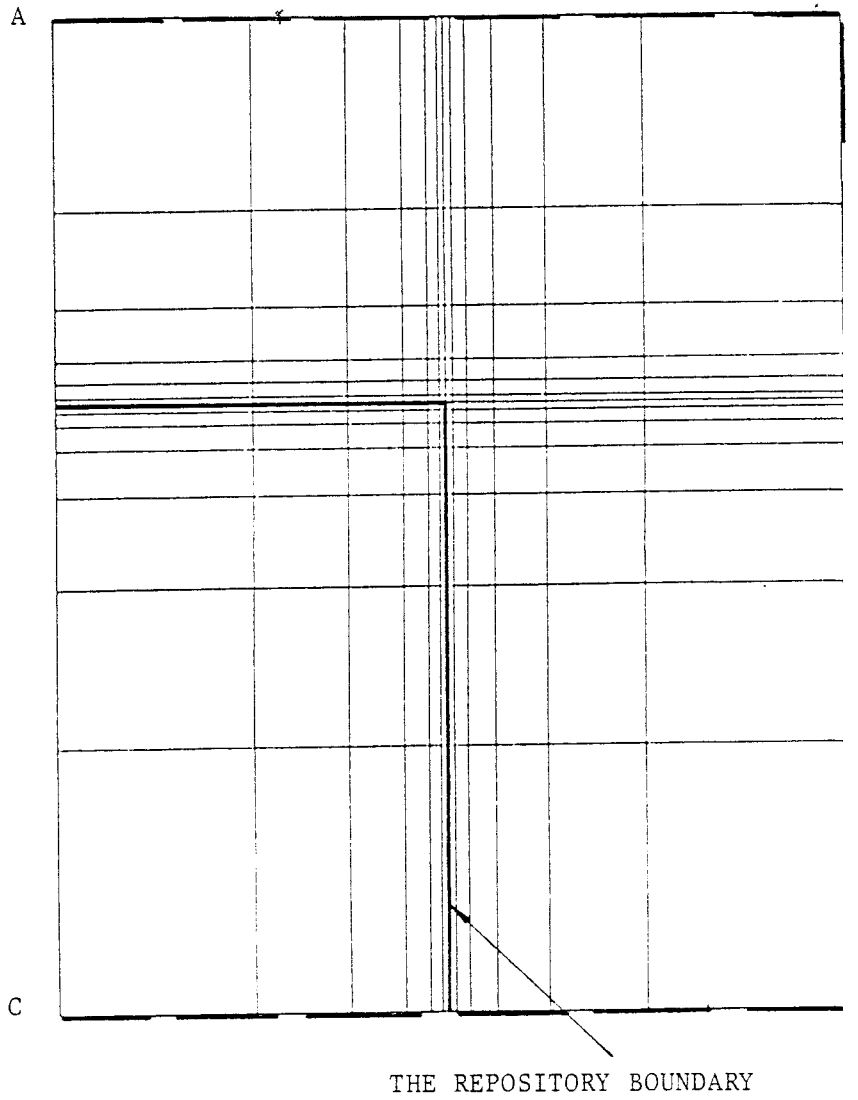

(b)

Figure 2. The discretization of the flow domain:  
(a) total flow domain and (b) the region  
around the repository.

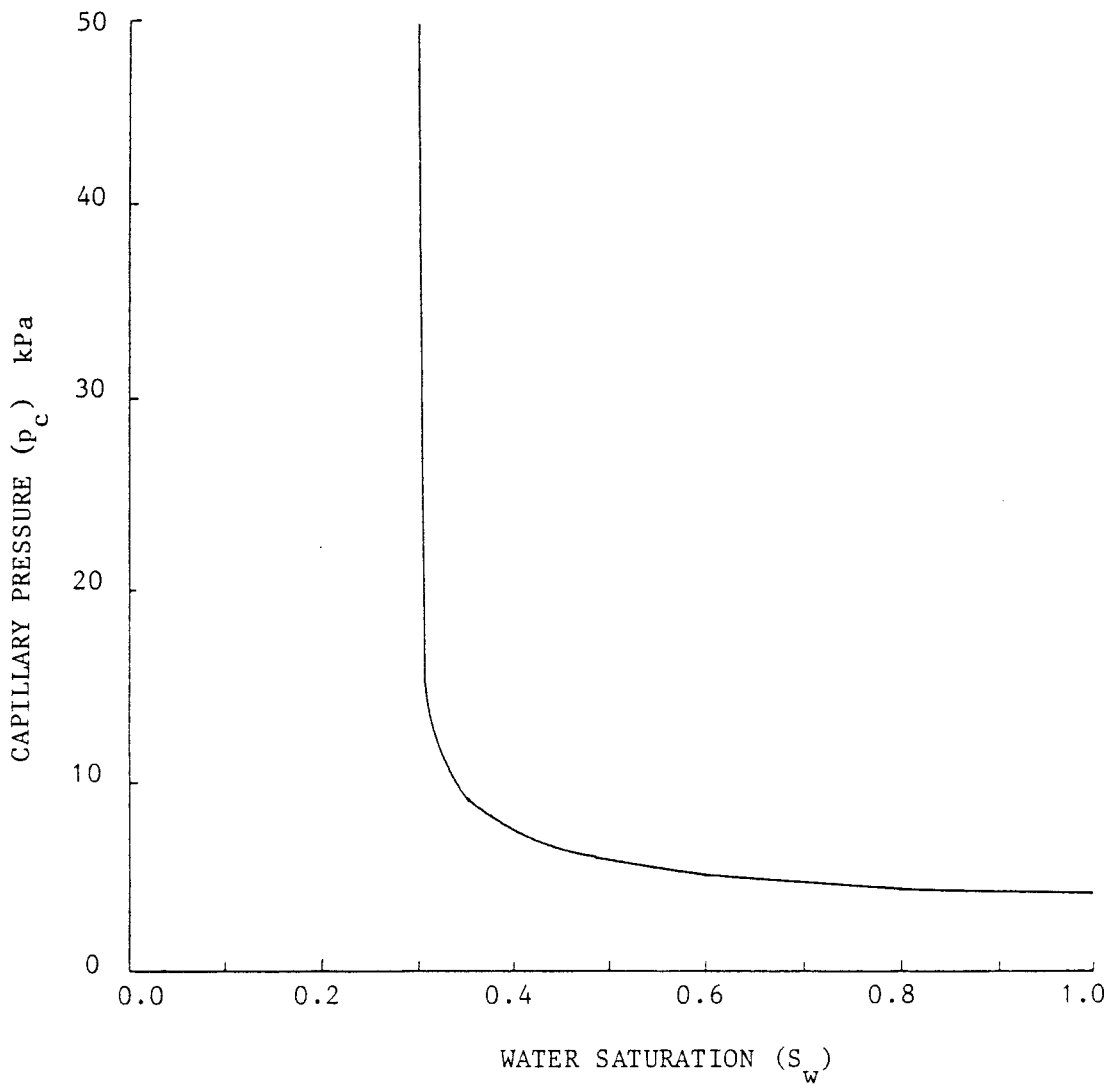


Figure 3. The capillary pressure function of saturation.

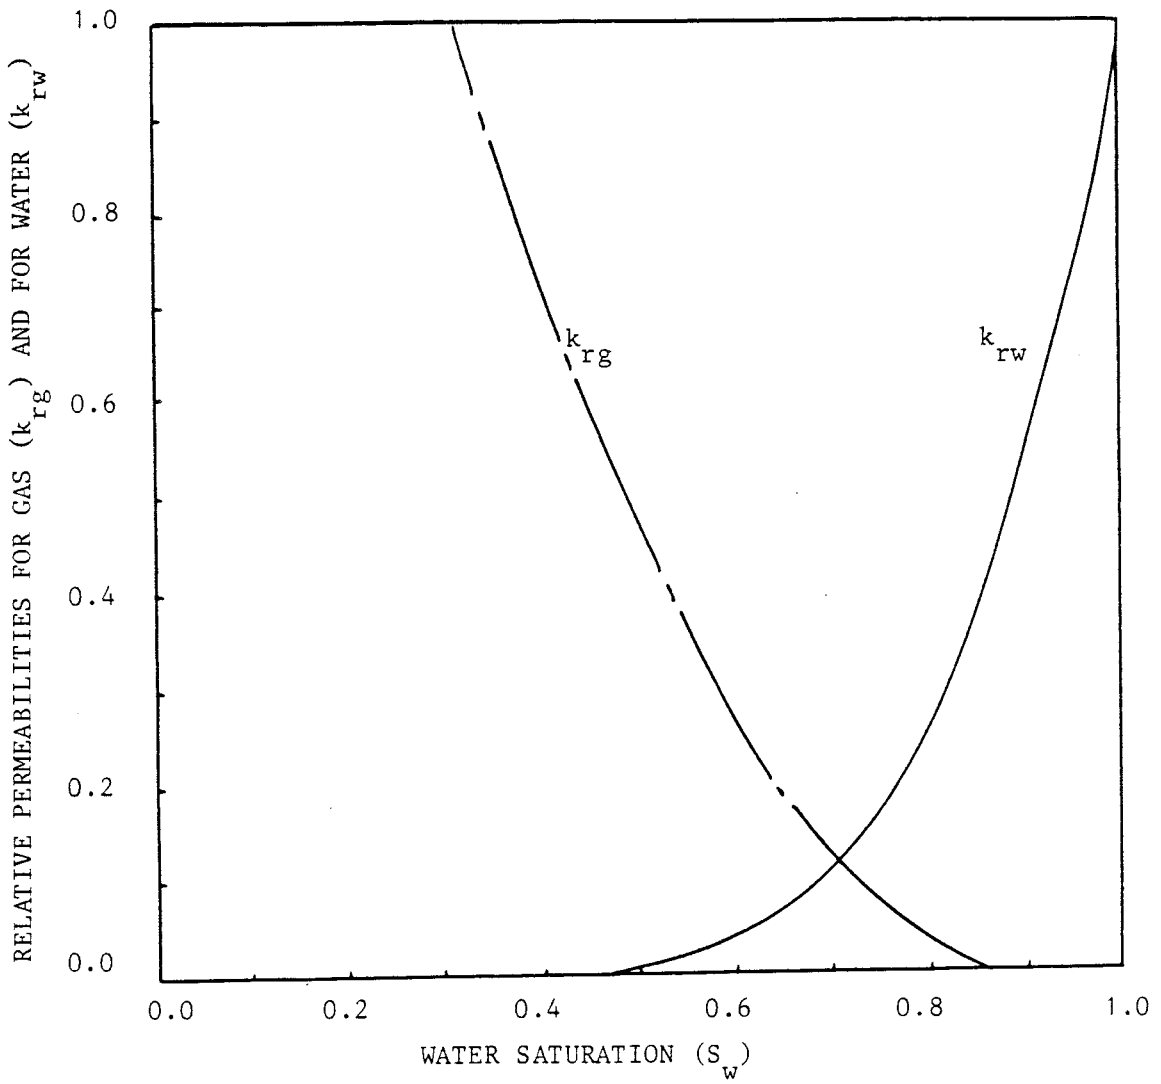


Figure 4. The relative permeabilities for gas and water as functions of saturation.

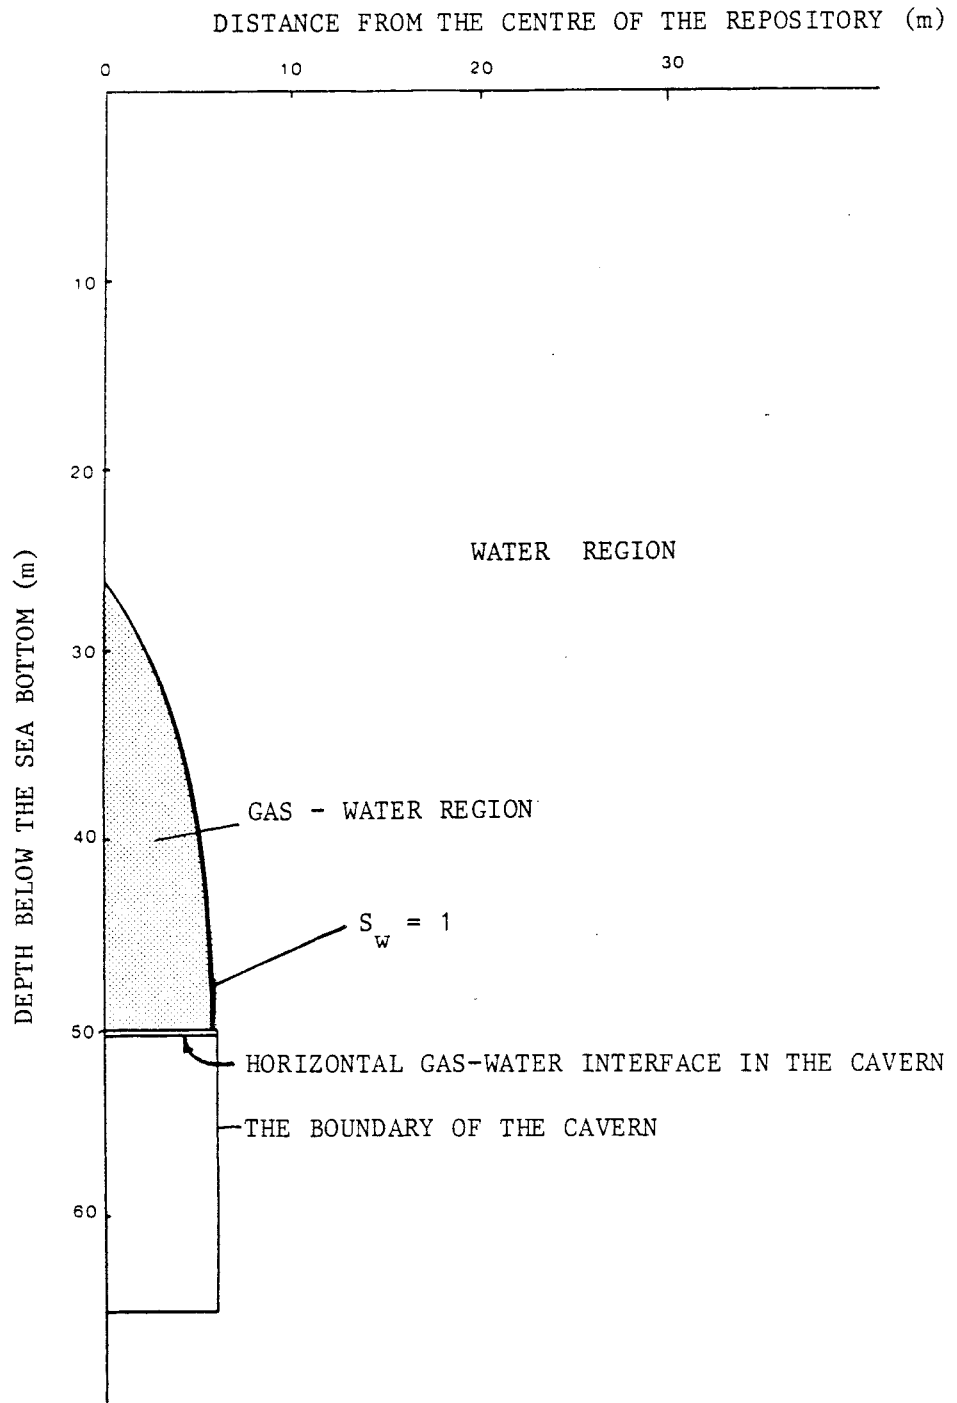


Figure 5. The gas-water front after 0.45 days.

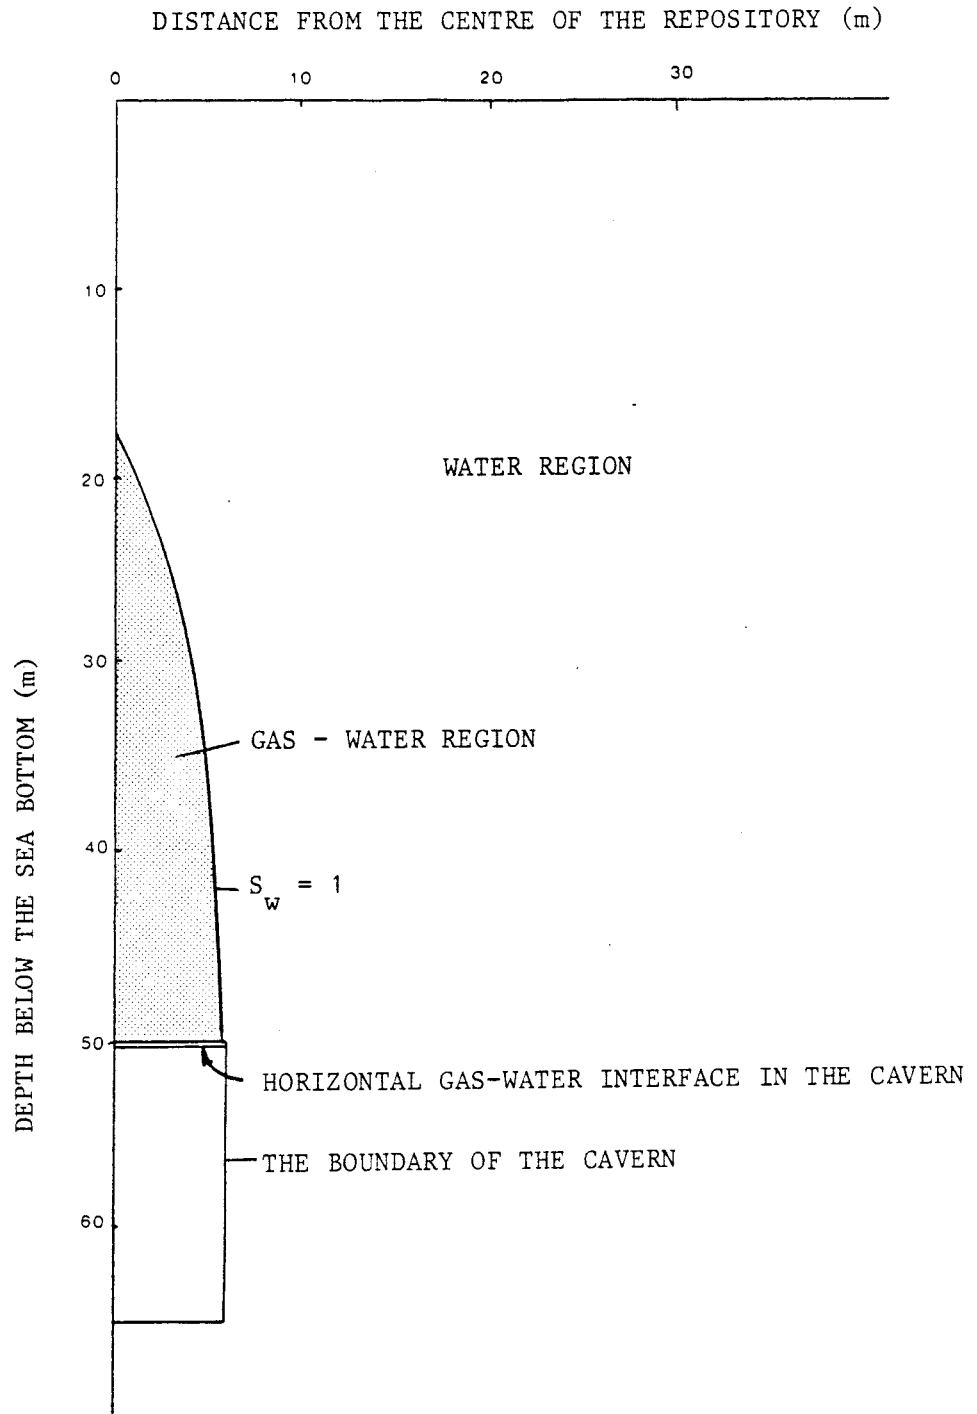


Figure 6. The gas-water front after 0.55 days.



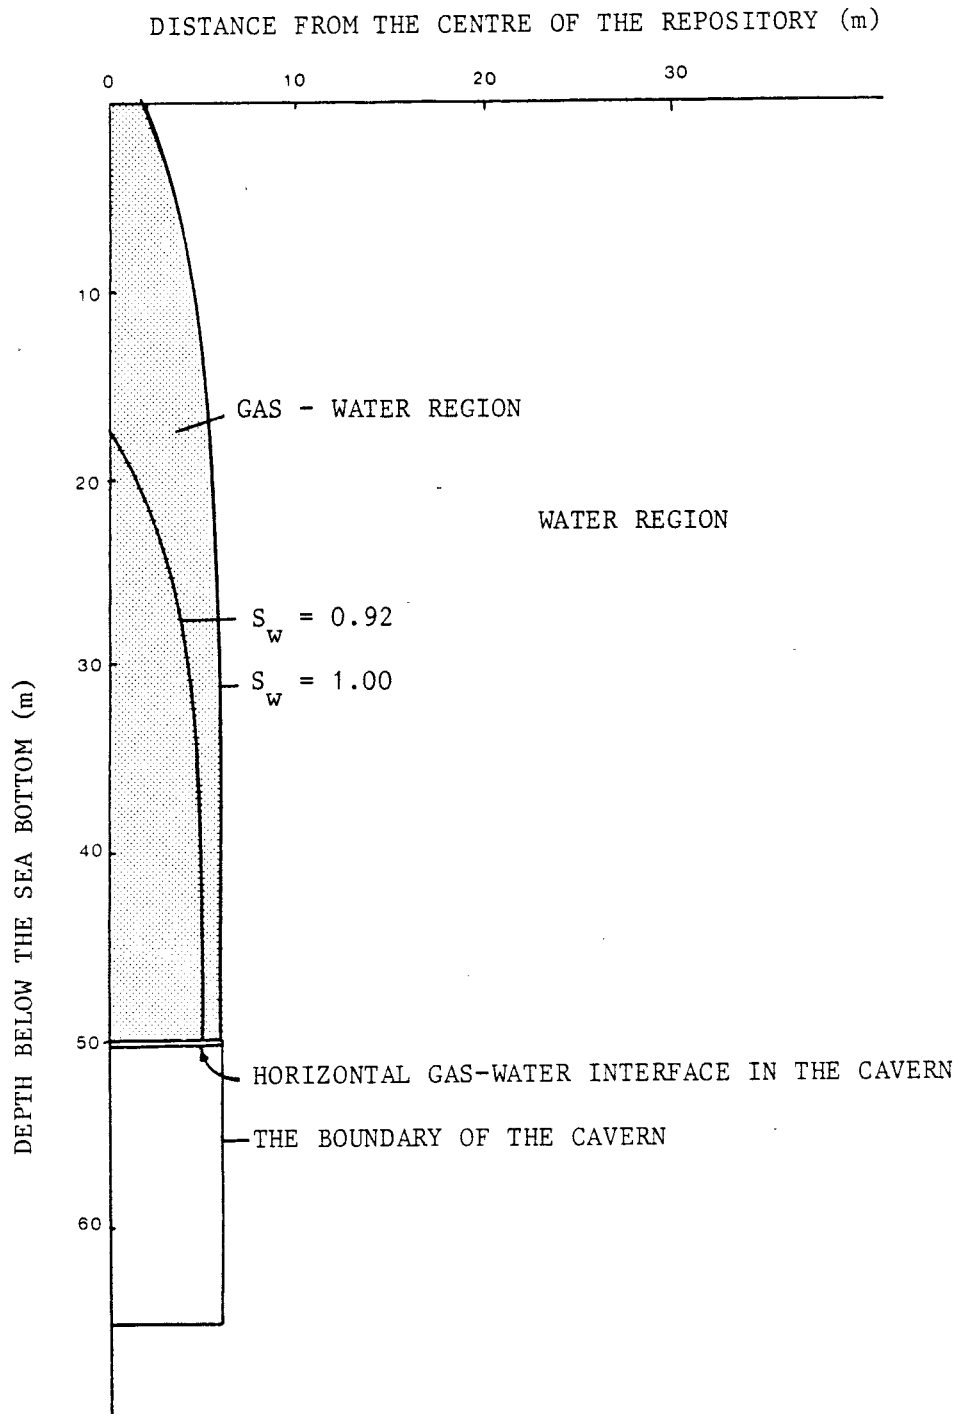


Figure 7. The gas-water front and the water saturation distribution at breakthrough at 0.6 days.

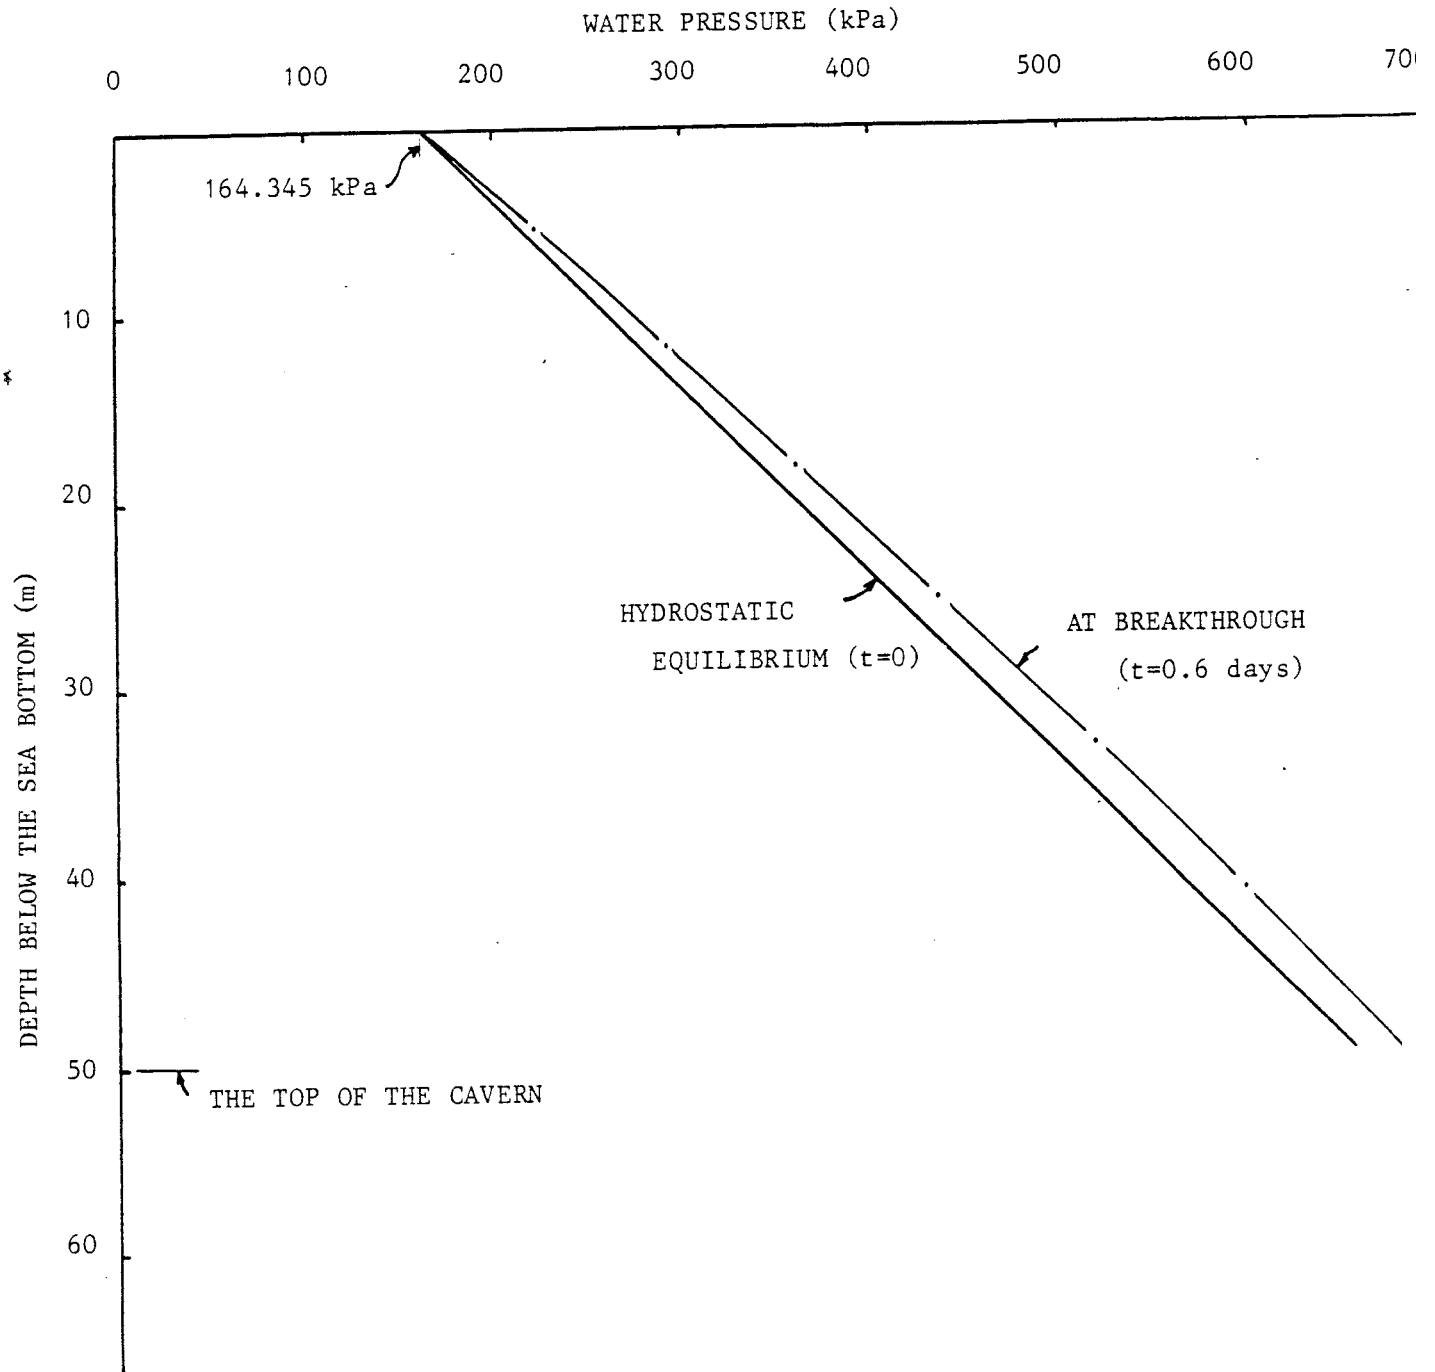


Figure 8. The initial (hydrostatic water pressure distribution and at the breakthrough at 0.6 days.

# List of SKB reports

## Annual Reports

1977-78

TR 121

### **KBS Technical Reports 1 – 120.**

Summaries. Stockholm, May 1979.

1979

TR 79-28

### **The KBS Annual Report 1979.**

KBS Technical Reports 79-01 – 79-27.

Summaries. Stockholm, March 1980.

1980

TR 80-26

### **The KBS Annual Report 1980.**

KBS Technical Reports 80-01 – 80-25.

Summaries. Stockholm, March 1981.

1981

TR 81-17

### **The KBS Annual Report 1981.**

KBS Technical Reports 81-01 – 81-16.

Summaries. Stockholm, April 1982.

1982

TR 82-28

### **The KBS Annual Report 1982.**

KBS Technical Reports 82-01 – 82-27.

Summaries. Stockholm, July 1983.

1983

TR 83-77

### **The KBS Annual Report 1983.**

KBS Technical Reports 83-01 – 83-76

Summaries. Stockholm, June 1984.

1984

TR 85-01

### **Annual Research and Development Report 1984**

Including Summaries of Technical Reports Issued during 1984. (Technical Reports 84-01-84-19)

Stockholm June 1985.

1985

TR 85-20

### **Annual Research and Development Report 1985**

Including Summaries of Technical Reports Issued during 1985. (Technical Reports 85-01-85-19)

Stockholm May 1986.

1986

TR86-31

### **SKB Annual Report 1986**

Including Summaries of Technical Reports Issued during 1986

Stockholm, May 1987

## Technical Reports

1987

TR 87-01

### **Radar measurements performed at the Klipperås study site**

Seje Carlsten, Olle Olsson, Stefan Sehlstedt, Leif Stenberg

Swedish Geological Co, Uppsala/Luleå

February 1987

TR 87-02

### **Fuel rod D07/B15 from Ringhals 2 PWR: Source material for corrosion/leach tests in groundwater**

### **Fuel rod/pellet characterization program part one**

Roy Forsyth, Editor

Studsvik Energiteknik AB, Nyköping

March 1987

TR 87-03

### **Calculations on HYDROCOIN level 1 using the GWHRT flow model**

#### **Case 1 Transient flow of water from a borehole penetrating a confined aquifer**

#### **Case 3 Saturated-unsaturated flow through a layered sequence of sedimentary rocks**

#### **Case 4 Transient thermal convection in a saturated medium**

Roger Thunvik, Royal Institute of Technology, Stockholm

March 1987

TR 87-04

### **Calculations on HYDROCOIN level 2, case 1 using the GWHRT flow model**

### **Thermal convection and conduction around a field heat transfer experiment**

Roger Thunvik

Royal Institute of Technology, Stockholm

March 1987

TR 87-05

### **Applications of stochastic models to solute transport in fractured rocks**

Lynn W Gelhar

Massachusetts Institute of Technology

January 1987

TR 87-06

**Some properties of a channeling model of fracture flow**

Y W Tsang, C F Tsang, I Neretnieks  
Royal Institute of Technology, Stockholm  
December 1986

TR 87-07

**Deep groundwater chemistry**

Peter Wikberg, Karin Axelsen, Folke Fredlund  
Royal Institute of Technology, Stockholm  
June 1987

TR 87-08

**An approach for evaluating the general and localized corrosion of carbon steel containers for nuclear waste disposal**

GP March, KJ Taylor, SM Sharland, PW Tasker  
Harwell Laboratory, Oxfordshire  
June 1987

TR 87-09

**Piping and erosion phenomena in soft clay gels**

Roland Pusch, Mikael Erlström,  
Lennart Börgesson  
Swedish Geological Co, Lund  
May 1987

TR 87-10

**Outline of models of water and gas flow through smectite clay buffers**

Roland Pusch, Harald Hökmark,  
Lennart Börgesson  
Swedish Geological Co, Lund  
June 1987

TR 87-11

**Modelling of crustal rock mechanics for radioactive waste storage in Fennoscandia—Problem definition**

Ove Stephansson  
University of Luleå  
May 1987

TR 87-12

**Study of groundwater colloids and their ability to transport radionuclides**

Kåre Tjus\* and Peter Wikberg\*\*  
\*Institute for Surface Chemistry, Stockholm  
\*\*Royal Institute of Technology, Inorganic  
Chemistry Stockholm  
March 1987

TR 87-13

**Shallow reflection seismic investigation of fracture zones in the Finnsjö area method evaluation**

Trine Dahl-Jensen  
Jonas Lindgren  
University of Uppsala, Department of Geophysics  
June 1987

TR 87-14

**Combined interpretation of geophysical, geological, hydrological and radar investigations in the boreholes ST1 and ST2 at the Saltsjötunnel**

Jan-Erik Andersson  
Per Andersson  
Seje Carlsten  
Lars Falk  
Olle Olsson  
Allan Strähle  
Swedish Geological Co, Uppsala  
1987-06-30

TR 87-15

**Geochemical interpretation of groundwaters from Finnsjön, Sweden**

Ignasi Puigdomènech<sup>1</sup>  
Kirk Nordstrom<sup>2</sup>  
<sup>1</sup>Royal Institute of Technology, Stockholm  
<sup>2</sup>U S Geological Survey, Menlo Park, California  
August 23, 1987

TR 87-16

**Corrosion tests on spent PWR fuel in synthetic groundwater**

R S Forsyth<sup>1</sup> and L O Werme<sup>2</sup>  
<sup>1</sup>Studsvik Energiteknik AB, Nyköping, Sweden  
<sup>2</sup>The Swedish Nuclear Fuel and Waste Management Co  
(SKB), Stockholm, Sweden  
Stockholm, September 1987

TR 87-17

**The July – September 1986 Skövde aftershock sequence**

Conny Holmqvist  
Rutger Wahlström  
Seismological Department, Uppsala University  
August 1987

TR 87-18

**Calculation of gas migration in fractured rock**

Roger Thunvik  
Royal Institute of Technology  
Stockholm, Sweden  
Carol Braester  
Israel Institute of Technology  
Haifa, Israel  
Stockholm, September 1987